



MODCON

SYSTEMS LTD

Process NMR Analyzer Model MOD-8000



The **MOD-8000** is a new generation of **NMR (Nuclei Magnetic Resonance)** online process analyzer. MOD-8000 is designed to analyze composition of process fluids, using magnetic resonance spectroscopic techniques. It can detect the presence and the concentration of the chemical constituents in a process stream. By utilizing exclusive software, it provides closed loop supervisory control of a process unit. It has an extensive range of applications from light Naphtha streams to heavy Crude oil.

The user benefits include :

- Increased throughput
- Better process control
- Timely detection of off-spec product
- Lower operating costs


NMR ANALYZER ADVENTAGES

- Increase of the productivity of valuable products
- Process control improvement
- Sub-standard products time-to-identify and an improvement of the quality of petroleum products
- Dramatically decrease of the operational costs of the production

NMR ANALYZER MOD-8000

SYSTEM KEY ADVANTAGES

- **Real time**, continuous **flow-through stream** analysis
 - ◇ Reduction in response time allows tighter control
- Provides analysis in **dense** and **opaque** materials
- **Direct Molecular Measurement**
 - ◇ No indirect predictions on critical measurements
- **Linear Spectral Response** across broad range
 - ◇ Models can be extrapolated accurately
- **Direct** and **Multi-property** analysis
 - ◇ Replaces conventional analyzers
 - ◇ Provides high accuracy data for precise control
 - ◇ High repeatability and reproducibility
- **Simple Sample Conditioning** required
 - ◇ No water removal, limited filtering
- **Minimal maintenance** required

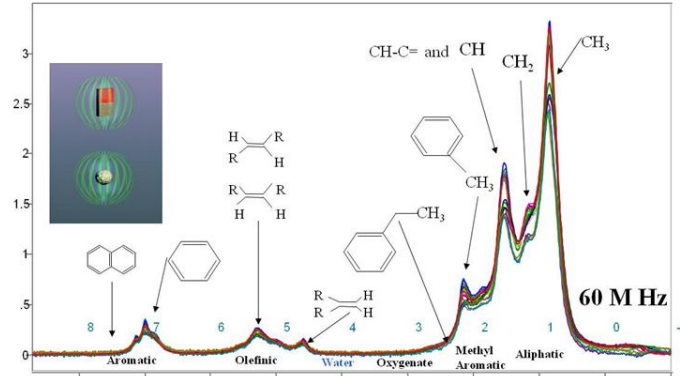

IMPLEMENTATION EXAMPLES

- Crude Switching/Blending
- Gasoline Blending
- Diesel Fuel Blending
- Fuel Oil Blending
- Naphtha Cracking
- Raw materials for catalytic cracking
- FCCU Distillates
- FCCU Feed
- CDU Distillate
- Catalytic Reforming



MODCON
SYSTEMS LTD

NMR ANALYZER MOD-8000

TECHNICAL SPECIFICATIONS

Measurement Method:	Nuclei Magnetic Resonance spectroscopy
Calibration Method:	Chemometrics
Multi-channel Ability:	Up to eight measurement streams
Time per Measurement:	Approximately 2 minutes (application dependent)
Sample Conditioning:	Application dependent
Communication:	Modbus over RS485 or over Ethernet, TCP/IP over Ethernet
Weight & Dimensions:	
Dimensions:	Stainless steel enclosure 140x190x60 (IP56 / NEMA 4X)
Weight:	400 kg
Power Consumption:	3 Ø 380 - 415 VAC 25 A
Environmental Operating Conditions:	
Operating Temperature:	+10°C to +40°C
Relative Humidity:	30-90% (non-condensing)
Storage Temperature:	0°C to +45°C
Standard Flow Cell:	48 inches (105 cm) long, 3/8 inches (10mm) diameter
Process Operating Conditions:	
Operating Temperature:	4°C to 120°C
Maximum Inlet Pressure:	25 bar
Flow rate requirement:	1000-3000 ml/min
Relative Humidity:	90% (non-condensing)
Instrument Air:	Dry, oil-free 3.5 bar minimum
Initial purge:	9.25 scfm (250 L/min) for 20 min
Continuous purge:	0.66 scfm (18 L/min)
Reference material:	Hexane or Toluene
Applications	
<ul style="list-style-type: none">• Crude Switching/Blending• Diesel Fuel Blending• Fuel Oil Blending• Gasoline Blending• Catalytic Reforming• Naphtha Cracking	



NMR ANALYZER MOD-8000

SYSTEM SUPPORT

- Calibration Models Construction
- Installation and start - up
- The support for the gauge models of the process is provided within one year from the validation date
- Real time remote support
- 24x7 remote support
- Technical support for hardware and software
- One year guaranty for all the components
- Complex deployment of analytical Shelters and peripheral equipment



BUSINESS AND SERVICE CENTERS

Russia

Perovskaya street 61 / 2, p. 1
Moscow 111 394
Tel: +7 (495) 9891840
Fax: +7 (495) 9891840 (9)

Israel

Bornshtein St. South Akko Ind.
Park, Acre 24222
Tel: +972-4-9553955
Fax: +972-4-9553956

Azerbaijan

Heydar Aliyev avenue 74/17 Baku
AZ 1033
Tel: 99412-4929859
Fax: 994-12-4929859

UK

St John Street
London EC1V 4PY 145-157
Tel: 44-207-5043626
Fax: 44-207-5043626

USA

Broadway Street, Suite #1203, San
Francisco, CA 94115 2000
Tel: 1-917-5916880
Fax: 1-360-2375906

Romania

Aleea Emil Botta, Nr. 4, BL. M104
Sc. 2, Et. 4, Ap. 56 Sector 3
Bucharest RO-031074
Tel: 40-21-3260533
Fax: 40-21-3260552